

ATLAS SUPPLY INC  
611 S. Charlestown St.  
Seattle, Washington 98108  
United States

## Dow Corning Construction Industry System General Test Laboratory Report - Sealant Adhesion

**Date:** 6/20/2013

**Document ID:** 63508

**Project Number:** 13-004187

**Project Name:** General Testing - Atlas Supply - Polycoat

ADHESION TESTING (Modified ASTM C794 Adhesion-in-Peel of Elastomeric Joint Sealants) or (ETAG 002 Paragraph 8.3.2.4)

This letter summarizes the final results of the peel adhesion testing of the Dow Corning® Weatherproofing Sealants as you requested.

**Method Description:** Substrates are cleaned and primed if necessary. The requested Dow Corning sealant is applied to the prepared substrate and a mesh is imbedded to a uniform depth into the wet sealant. More sealant is applied over the first bead and mesh screen; and then the excess sealant, while still wet, is removed beyond the edge of the mesh screen. Samples are allowed to cure 7 days at 73 +/- 4 Deg F and 50% +/- 5% RH. A pull test is then performed. The sample is then immersed in water for one day, and another pull test is performed.

**General Test Guidelines:** The attached test results performed as a “General Test” do not constitute an approval by Dow Corning for any Dow Corning Sealant application. The substrates provided, tests performed and test results were made at your request according to ASTM C794 testing with reporting of peel strength (lbs/in) and mode of failure (% cohesive). Dow Corning disclaims any responsibility and/or liability for use of the peel strength and mode of failure test results in any project specific application as conditions and methods of use are beyond our control. The results of these tests are not sufficient to obtain a Dow Corning warranty on a current or future project. If a Dow Corning warranty is required or requested for an intended end use, additional samples and retesting must be performed by a Dow Corning test lab as outlined in the Americas Technical Manual.

**DOW CORNING CORPORATION**  
Your Global Construction Connection @  
[www.dowcorning.com](http://www.dowcorning.com)

**AMERICAS**  
Sealant Test Lab, DC-4, Lab 3A4  
2200 W. Salzburg Road  
Auburn, MI 48611  
USA  
Tel: 989 496 5237  
Fax: 989 496 4374  
Americas.Coins@dowcorning.com

**ASIA**  
Songjiang Plant Dow Corning  
(Shanghai) Company, Ltd.  
448 Eastern Ave.  
Songjiang Industrial Zone  
Shanghai 201613, P. R. China  
Phone: 86 21 5774 1161  
Fax: 86 21 5774 3471  
Asia.Coins@dowcorning.com

**EUROPE**  
Parc de Seneffe Dow Corning  
S.A.  
Parc Industrie  
7180 Seneffe  
Belgium  
Phone: 32 64 888 000  
Fax: 32 0 64 88 8950  
Europe.Coins@dowcorning.com


Product	Primer	Material Failure	7 Day Cure at Room Temperature		1 Day Water Immersion		
		Material Failure	Peel Strength ( pli )	Cohesive Failure %	Peel Strength ( pli )	Cohesive Failure %	
<b>Sample number 26150 - PC-220 Tan Elastomeric Base Coat</b>							
791 White	1200-OS Clear	No	30	50	52	100	
791 White	NONE None	No	22	50	22	0	
795 White	1200-OS Clear	No	44	100	48	100	
795 White	NONE None	No	0	0	0	0	
<b>Sample number 26582 - Polydeck 100SC Tan Pedestrian Decking System</b>							
791 White	1200-OS Clear	No	48	100	62	100	
791 White	NONE None	No	48	100	58	100	
795 White	1200-OS Clear	No	54	100	62	100	
795 White	NONE None	No	14	0	22	10	
<b>Sample number 26583 - PC-550SC Gray Elastomeric Base Coat</b>							
791 White	1200-OS Clear	No	44	100	52	100	
791 White	NONE None	No	22	0	16	100	
795 White	1200-OS Clear	No	46	100	36	100	
795 White	NONE None	No	8	0	16	40	
<b>Sample number 26584 - Polyglaze AL-50 Dolphin Gray Pedestrian Decking System</b>							
791 White	1200-OS Clear	No	44	100	42	100	
791 White	NONE None	No	48	100	46	100	
795 White	1200-OS Clear	No	44	100	38	100	
795 White	NONE None	No	20	30	16	100	
<p>PLI = Pound per Lineal Inch                      Cohesive Failure= The sealant failed within itself versus adhesive failure when the sealant de-bonds from the substrate.                      Preparation: Isopropyl alcohol (IPA) wipe                      Conditions: 7 day cure (73 +/-4 F° and 50 +/- 5% Relative Humidity), 1 day water immersion.</p>							

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of the shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

Sincerely,

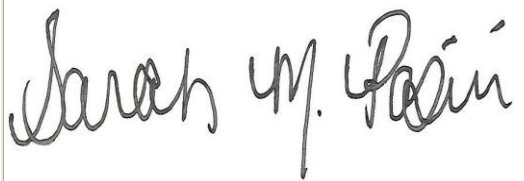

SARAH PASINI  
BUSINESS DEVELOPMENT PROFESSIONAL  
206-216-4921